
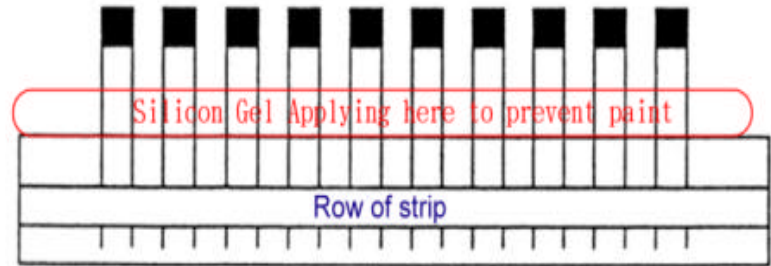


### 自動輪矽機 LIC-050

## Automatic Silicon Gel Applying Machine

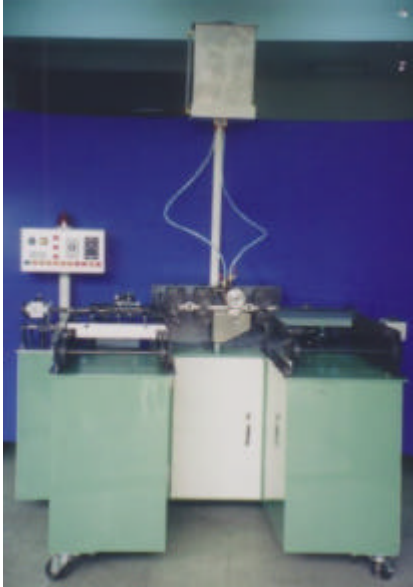

#### 優點

1. 自動輸送排條，輪上矽膠水後能將條排自動收拾整齊。
2. 矽膠水儲存方式,採用定時自動補充,和迴流方式 不但節省原料更節省人力, 同時可一人照料多部機器。
3. 採用真空輸送排條 及排條定位點控制方式控制排條輸送動作 提昇穩定性。
4. 排條入滑導時先噴矽後 再輪矽等兩次功能一次完成 讓膠水噴在導線表面 使接著更均勻
5. 不損傷導線表面
6. 不影響焊錫特性
7. 不影響產品原本品質

#### 規格

生產速度:每分鐘 26 只 (排條 310 長)

電壓: 220V/50 – 60 HZ

氣壓 :5Kg

機台尺

寸:1600x01200x1450(DxWxH)mm

機台重量: 700KG

#### Advantage:

1. Automatic transport the row of strip into its position, automatically tidy up the row of strip after apply silicon gel water has applied on to the capacitor lead.
2. Silicon gel water will be automatically supplemented and recycle it which not only saves the silicon gel and the manpower. Simultaneously one person could take care many machines.
3. Vacuum delivery the row of strip in its precise position, that helps silicon gel daub evenly.
4. When the row of strip enters the slide way the nozzle will spurt silicon gel water on capacitor lead then rolling the lead by wheel to have well mixed silicon gel.
5. LIC-050 does not damage the lead wire surface.
6. LIC-050 does not affect the soldering tin characteristic
7. LIC-050 does not affect the product quality.

#### Specification:

Speed: 26 Pieces/Min (row of strip length is 310 long)

Power: 220V/50 – 60 HZ

Air pressure: 5Kg

Size: 1600x01200x1450mm

Weight: 700KG