



### 自動壓型機 LIHP-258

### Automatic Forming Machine (For Capacitor Core)

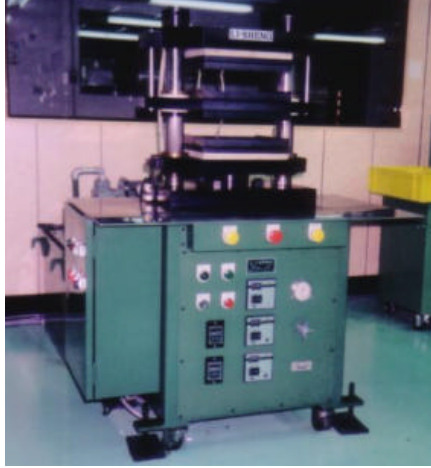

- |  |   |
|--|---|
| <ol style="list-style-type: none"> <li>1. 本機分為自動門與無自動門兩種機型.</li> <li>2. 自動門--開與關門是全自動的,可減少室內溫熱效應 確保溫度的平均和減少加溫所需的時間及減低耗電量.</li> <li>3. 機器構造簡單精密,操作方便,故障少易保養.</li> <li>4. 熱壓板經處理,研磨,不易變形平行度佳.</li> <li>5. 溫度控制由電子控制 溫度平均+/-2.5 度內.</li> <li>6. 油壓系統採進口零件精密噪音低 壓理穩定經久耐用.</li> <li>7. 油壓鋼經特殊設計 不漏油 出力平穩.</li> <li>8. 油壓單元經雙層過濾確保機件精密機油經冷卻風扇循環確保機油潤滑性.</li> </ol> | <ol style="list-style-type: none"> <li>1. Optional automatic or manual door.</li> <li>2. Automatic door may reduce the room warm up the effect to guarantee stable temperature and heating time in chamber that also save power consumption.</li> <li>3. The structure is precise, simple to operate, low failure rate and easy to maintain.</li> <li>4. The thermo-compression plate has been grinds and treated, has no distortion problem.</li> <li>5. Electronic temperature controller provide average with in +/-2.5 degree tolerance.</li> <li>6. The Hydraulic system provides low noise, stable and durable.</li> <li>7. The oil-compressed steel has special design that does not have oil-leaking problem.</li> <li>8. Double filters guarantee and keep the part precise, Cooling fan circulation system guarantees the machine oil lubricating ability and quality.</li> </ol> |
|--|---|

Model 型式	LIHP-258	LIHP258	LIHP-258	LIHP-258
Spec 規格	300x300 single layer	300x300 Double Layer	300x300 Triple Layer	450x450 Triple Layer
Heater 電熱	1800W	3000W	4200W	9200W
Rising Speed 上昇速度	10mm/min	10mm/min	10mm/min	10mm/min
Power 電源	220VAC 60HZ	220VAC 60HZ	220VAC 60HZ	220VAC 60HZ
Temp Range 溫度調整	0-399	0-399	0-399	0-399
Oil Pressure 壓低調整	0-140 kg/C m <sup>2</sup>	0-140 kg/C m <sup>2</sup>	0-140 kg/C m <sup>2</sup>	7-50 kg/C m <sup>2</sup>
Oil Pump 油壓幫浦	3HP/6P or 5HP/6P	3HP/6P or 5HP/6P	3HP/6P or 5HP/6P	3 H P / 6 P
Oil Tank 油箱容量	50L	50L	50L	150L
Parallelism 平行度	± 0.02mm	± 0.02mm	± 0.02mm	± 0.02mm
Surface Temp.表面溫度	± 2.5	± 2.5	± 2.5	± 2.5