


Automatic Capacitor Lead Welding & Organized Machine (0.5Dia - 0.6Dia CP or copper wire)

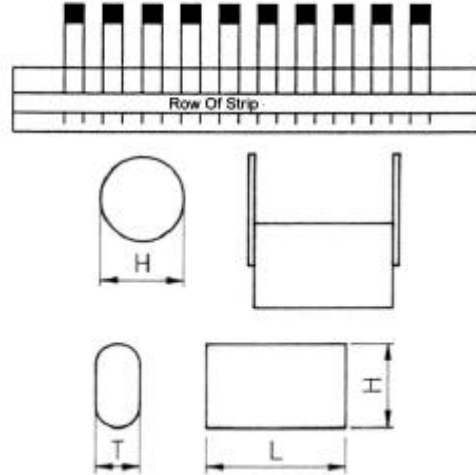

優點

1. 全自動送料處理.四角選向
2. 素子自動電壓清除 DC 0V - 1500V
3. 自動送導線裝置 將導線鋼性重新處理
4. 導線兩端長度可任意調整距離
5. 傳動凸輪式 故障率低
6. 素子點焊 一次完成高效率
7. 精密熔接交流導通 角度控制
8. 點焊兩邊各自獨立控制
9. 變壓器穩定性特佳 不會產生假焊
10. 熔接獨立 Q.C.選別功能
11. 小型專用 選向 電壓清除 接線短路自動排除 整排 收齊

規格:

素子材質: ,金屬化膜.

導線: 長度 29mm-32mm 可調整

外徑 0.5Dia - 0.6Dia

CP 線或銅線

生產速度:每分鐘 30~60 只 ,可調速度

電源: 220VAC 50/60HZ 1Phase 2Watts

尺寸:1700x1780x1500mm

重量:980Kgs

尺寸 (Dimension):

素子材質(Capacitor Core).	Unit (mm)	L	H	T
金屬化膜, Metallize Film	最小 Small	5	5	2
金屬化膜 Metallize Film	中型 Medium	7.5	5	2.5
金屬化膜 Metallize Film	大型 Large	10	10	5

Advantage/ Merit:

1. Automatic material delivers system and auto direction.
2. Auto-discharging form DC0V to DC1500V
3. Automatically delivers the wire and readjusts the wire steel wire characteristic.
4. Free to adjust on the lead wire length.
5. Use cam transmission wheel system the failure rate is very low.
6. One procedure to finish all welding job it is very efficiency
7. One procedure to finish all welding job it is very efficiency.
8. Both side of spot welding control circuit are operated individually.
9. High quality transformer provides very stability voltage and current that could prevent cold solder.
10. LIW - 168S provide Spot-welding, Quality control functions in one machine.
11. Special purpose for small-scale capacitor, could auto direction, open short check, voltage discharging, auto arranges and collection functions are in one machine.

Spec:

Capacitor core: Metallize Film

Lead Wire: length 29 - 32mm adjustable

Outer diameter: 0.5Dia - 0.6Dia CP or copper wire

Producing speed: 30 to 60/ Minute, Speed adjustable

Power: 220VAC 50/60HZ 1Phase 2Watts

Machine Size: 1700x1780x1500mm

Machine Weight: 980Kgs