


### 電容器全自動接腳加串排機 LIW-300A

### Automatic Lead Wire Welding Machine (Plus Row Of Strip) (0.6Dia - 0.8Dia CP or copper wire)

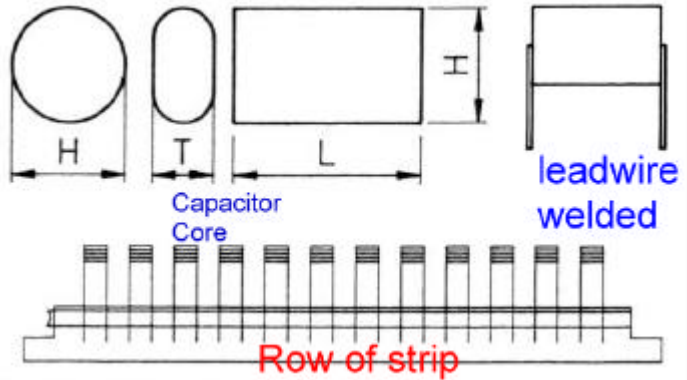

#### 優點

1. 全自動送料處理
2. 自動送導線裝置 將導線鋼性重新調整
3. 更換導線規格 不必重新調整導線輪, 可以整組換裝 節省時間與導線的損耗
4. 導線兩端長度可任意調整距離
5. 傳動凸輪式 故障率低
6. 鋁箔 錫箔 金屬化膜 均可使用
7. 素子點焊 一次完成高效率
8. 精密熔接交流導通角度 波型控制
9. 點焊兩邊各自獨立控制與獨立焊接
10. 變壓器穩定性特佳 不會產生假焊
11. 熔接獨立 Q.C. 選別功能
12. 熔接時可任意調整串排或不串排作業方式.

#### 規格:

素子材質: 錫箔, 金屬化膜.

導線: 長度 29 -32mm 可調整

外徑: 0.6Dia - 0.8Dia

CP 線或銅線

生產速度: 熔接加串排每分鐘 40 只可調速度

熔接加不串排每分鐘 52 只

電源: 220VAC 50/60HZ 1Phase 2Watts

尺寸: 1500x900x1550mm

重量: 800Kgs

#### 尺寸 (Dimension):

素子材質( capacitor Core)	Unit (mm)	L	H	T
錫箔, 金屬化膜 Tinfoil, Metallize Film	最小 Minimum	6	5	2
錫箔, 金屬化膜 Tinfoil, Metallize Film	中型 Mediem	15	10	6
金屬化膜, Metallize Film	最大 Large	30	20	12

#### Advantage/ Merit:

1. Automatic material delivers system.
2. Automatically delivers the wire and readjusts the wire steel wire characteristic.
3. When wire spec is changed just simple change whole set of lead wire guider wheel that save the time and prevent wire loss
4. Free to adjust on the lead wire length.
5. Use cam transmission wheel system the failure rate is very low
6. Suitable for aluminum foil, tinfoil, metallize Film type capacitor
7. One procedure to finish all welding job it is very efficiency.
8. Special wave format and control circuit provides precise welding.
9. Both side of spot welding control circuit are operated individually.
10. High quality transformer provides very stability voltage and current that could prevent cold solder.
11. LIW - 300A provide Spot-welding, Quality control functions in one machine
12. Could select to put capacitor into row of strip or not in the welding procedure.

#### Spec:

Capacitor core: Tinfoil, Metallize Film

Lead Wire length: 29-32mm adjustable

Outer diameter: 0.6Dia - 0.8Dia CP or copper wire

Producing speed: 40Pcs Plus add to Row of strip or 52Pcs /Minute ,Speed adjustable.

Power: 220VAC 50/60HZ 1Phase 2Watts

Machine Size: 1500x900x1550mm

Machine Weight: 800Kgs