


平台式自動接腳機 LIW-528

Automatic Lead Wire Welding Machine

(0.6Dia - 0.8Dia CP or Copper Wire)

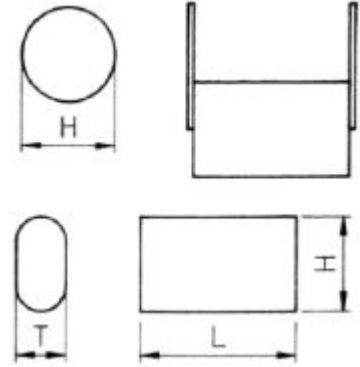

優點

1. 全自動送料處理
2. 自動送導線裝置 將導線鋼性重新處理.
3. 更換導線規格 不必重新調整導線輪,可以整組換裝 節省時間與導線的損耗
4. 導線兩端長度可任意調整距離
5. 傳動凸輪式 故障率低
6. 鋁箔 錫箔 金屬化膜 均可使用
7. 素子點焊 一次完成高效率
8. 精密熔接交流導通角度 波型控制
9. 點焊兩邊各自獨立控制與獨立焊接
10. 變壓器穩定性特佳 不會產生假焊
11. 熔接獨立 Q.C.選別功能

規格:

素子材質: 錫箔,鋁箔 ,金屬化膜.

導線: 長度 29mm 可調整

外徑 0.6Dia - 0.8Dia

CP 線或銅線

生產速度:每分鐘 30~80 只可調速度

電源: 220VAC 50/60HZ 1Phase 2Watts

尺寸:1200x1500x1200mm

重量:650Kgs

| 素子材質 (capacitor Core) | Unit (mm) | L | H | T |
|--|------------|-----|----|-----|
| 錫箔,鋁箔 ,金屬化膜 Tinfoil, aluminum foil, Metallize Film | 最小 Minimum | 7.5 | 5 | 2.5 |
| 錫箔,鋁箔 ,金屬化膜 Tinfoil, aluminum foil, Metallize Film | 中型 Mediem | 15 | 10 | 6 |
| 金屬化膜, Metallize Film | 最大 Large | 30 | 20 | 12 |

Advantage/ Merit:

1. Automatic material delivers system.
2. Automatically delivers the wire and readjusts the wire steel wire characteristic.
3. When wire spec is changed just simple change whole set of lead wire guider wheel that save the time and prevent wire loss
4. Free to adjust on the lead wire length.
5. Use cam transmission wheel system the failure rate is very low
6. Suitable for aluminum foil, tinfoil, metallize Film type capacitor
7. One procedure to finish all welding job it is very efficiency.
8. Special wave format and control circuit provides precise welding.
9. Both side of spot welding control circuit are operated individually.
10. High quality transformer provides very stability voltage and current that could prevent cold solder.
11. LIW – 528 provide Spot-welding, Quality control functions in one machine

Spec:

Capacitor core: Tinfoil, aluminum foil, Metallize Film.

Lead Wire: length 29mm adjustable

Outer diameter: 0.6Dia - 0.8Dia CP or copper wire.

Producing speed: 30 to 80/Minute, Speed adjustable

Power: 220VAC 50/60HZ 1Phase 2Watts.

Machine Size: 1200x1500x1450mm.

Machine Weight: 650Kgs.